

UNIVERSITY OF MINNESOTA

ISPC26

26th International Symposium on Plasma Chemistry

University of Minnesota
Minneapolis, MN, USA

June 15–20, 2025

www.ispc-conference.org



Welcome

Dear Colleagues and Friends,

We are pleased to welcome you to the 26th International Symposium on Plasma Chemistry (ISPC26), on the campus of the University of Minnesota in Minneapolis, USA.

The symposium aims to bring together leading experts, academics, engineers, practitioners, and students working in the field of plasma chemistry and to establish an informal forum for discussing plasma chemistry, the exchange of new ideas, and to foster new connections and collaborations. We hope that the symposium will offer you a unique opportunity to gain comprehensive first-hand information on the latest developments in the field of plasma chemistry.

ISPC was held for the first time in 1973 and is sponsored by the International Plasma Chemistry Society (IPCS), the largest international not-for-profit professional society specializing in plasma chemistry. The IPCS was established in 1999 as the successor of the association named 'the International Union of Pure and Applied Chemistry (IUPAC) Subcommittee on Plasma Chemistry.' As some of you might remember, ISPC 12 took place here in Minneapolis thirty years ago (1995) chaired by Professor Joachim Heberlein.

This year, the IPCS Summer School is collocated with the US Low-Temperature Plasma Summer School and the ASPIRE Summer School, and took place over the weekend prior to ISPC26. The school had as goal to provide an opportunity for graduate students and early-career researchers and engineers to be immersed in the fundamentals and applications of low-temperature plasmas and to learn from leading researchers in their field. There was a special session on Plasma Materials Processing for Microelectronics Fabrication. We also offer a special invited session on Monday morning on the topic of plasma chemistry for microelectronics fabrication.

The campus of the University of Minnesota Twin Cities is located in the metropolitan area of the cities of Minneapolis and Saint Paul and is connected by light rail to the downtown areas and also to the airport. We hope you also have the opportunity to explore the Twin Cities area and enjoy the natural beauty of the Mississippi River and parks, along with the region's rich industrial history, vibrant culture, and growing craft beer scene.



Peter J. Bruggeman
University of Minnesota, USA
Chair ISPC 26



Bruce Locke
Florida State University, USA
President IPCS

Surface DBD in contact with liquids to produce reactive species in liquids and to decontaminate catheters

O. Galmiz¹, B.G. Kimani¹, R. Cimerman¹ and Z. Machala¹

¹Division of Environmental Physics, Faculty of Mathematics, Physics and Informatics, Comenius University in Bratislava, Slovakia

Abstract: In this contribution, we report measurements of gaseous and liquid species produced by a surface dielectric barrier discharge with water electrode ignited in two configurations. The antimicrobial effects of such plasma discharge on planktonic *E. coli* in water and on a 48-h biofilm grown on the inner surface of the tubes were studied.

1. Introduction

Surface dielectric barrier discharge (SDBD) systems generate plasma along a dielectric surface but are limited in direct interaction with liquids, restricting the formation of short-lived reactive species in plasma-activated liquids (PAL). To overcome this, we utilize a liquid electrode system that enables SDBD ignition directly from the liquid surface [1]. While plasma-water contact is confined to the dielectric tube's perimeter, the system remains scalable and adaptable, making it suitable for water activation, surface treatment, and medical applications such as catheter decontamination.

2. Experiment

The SDBD discharge was operated in the ambient air at atmospheric pressure. The high-voltage (HV) sine waveform was set to the amplitude of 10 to 20 kV and operated at a frequency of ~31 kHz depending on the experimental conditions. The power to the liquid electrodes was supplied by a high-voltage resonance generator *Lifetech-300W* coupled with a function generator. The electrical characteristics of the discharge were monitored.

Two electrode configurations were investigated: an open-air setup for the treatment of the outer surface of the polymeric tube and an in-tube configuration, where the SDBD discharge was ignited on the inner surface of the tube (Fig. 1). The concentrations of gaseous species were analyzed by the FTIR and UV-vis absorption spectrometers. The treated liquids were analyzed by UV-vis absorption spectroscopy to quantify the aqueous concentrations of ozone (O_3), hydrogen peroxide (H_2O_2), nitrite (NO_2^-), and nitrate (NO_3^-). Antimicrobial effects were tested using a thermostatic plate-counting procedures applied on planktonic *E. coli* in water or on a 48-h biofilm grown on the inner surface of the tubes.

3. Key results

The gaseous plasma products were only O_3 , N_2O , and N_2O_5 gas products. The discharge operated primarily in an O_3 -dominated mode, with negligible formation of NO , NO_2 , HNO_2 , and HNO_3 in the gas phase.

The SDBD reactor configuration strongly influences the aqueous species production in PAL. When compared to values reported in the literature, the proposed system exhibits comparable or even superior efficiency in RONS generation, especially in in-tube configuration.

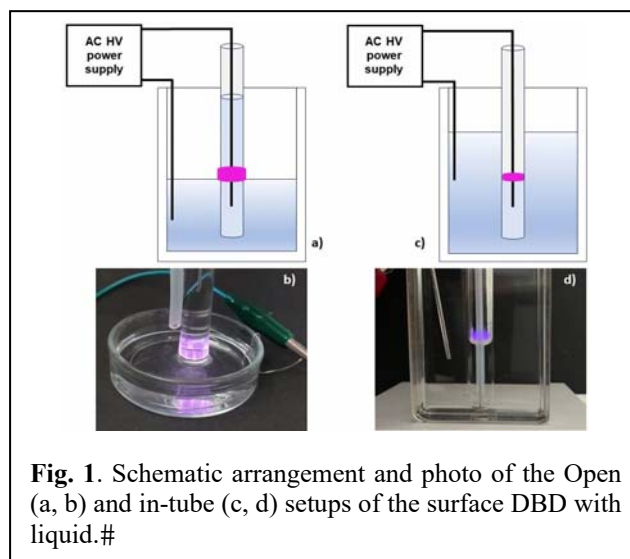


Fig. 1. Schematic arrangement and photo of the Open (a, b) and in-tube (c, d) setups of the surface DBD with liquid.#

The decontamination efficiency tested on both planktonic (in water) and biofilm (on the inner tube surface) forms of *E. coli* resulted in up to 2 log and 6 log reductions in the case of open and in-tube configurations, respectively. Depending on the plasma parameters and the treatment duration, a complete biofilm destruction inside the tube was achieved.

4. Summary

The implementation of SDBD at the gas/liquid/solid interface introduces a novel plasma-based decontamination method for catheters and other medical tubing, and for water treatment. The study demonstrates the potential of SDBD for advanced material processing and sterilization, highlighting its versatility for medical and industrial applications.

Acknowledgment

Funded by the EU NextGenerationEU through the Recovery and Resilience Plan for Slovakia under the projects No. 09I03-03-V03-00033 EnvAdwice and 09I03-03-V04-00094 PlasProMeTu, and by the Marie S. Curie Action Postdoctoral Fellowship under Horizon Europe with grant agreement number 101066764.

References

[1] O. Galmiz et al., *Plasma Sources Sci. Technol.* (2025), under revision.